

NFS40 Series

Single and
triple output

Total Power: 40 - 50W
Input Voltage: 85 - 264VAC
120 - 370VDC

of Outputs: Single, triple

Special Features


- 5.0 x 3.0 x 1.2 inch package (1U applications)
- Industry standard package
- Overvoltage and short circuit protection
- 40 W with free air convection
- EN55022, EN55011 conducted noise level A
- UL, VDE and CSA safety approvals
- Available RoHS compliant
- 2 year warranty

Safety

VDE0805/EN60950/
IEC950/IEC1010
File No. 10401-3336-0044
Licence No. 2559

UL1950 File No. E136005

CSA C22.2 No. 950
File No. LR41062C

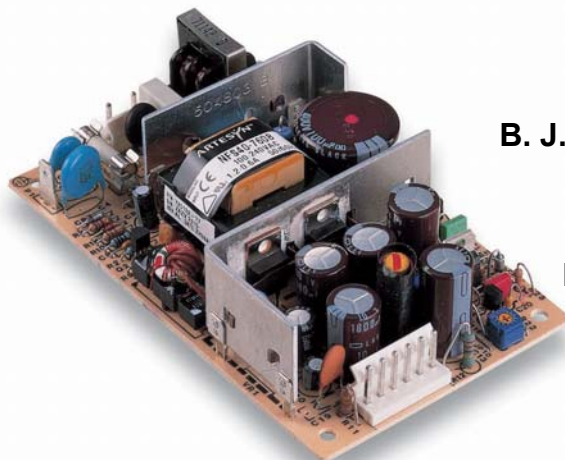

Distributed By:
B. J. Wolfe Enterprises, Inc
Tel: (800) 554-1224
(818) 889-8412
Fax: (818) 889-8417
Email: info@bjwe.com

The NFS40 series is a 40 W universal input ac-dc power supply on a 5" x 3" card with a maximum component height of 1.2" for use in 1U applications. The NFS40 series is available with a wide range of models in the industry standard 5" x 3" footprint and has proven itself to be highly reliable and versatile product for a wide range of communication and industrial applications. The NFS40 provides 40 W of output power with free air convection cooling which can be boosted to 50 W with 20 CFM of air. Standard features include OVP and short-circuit protection. The series, with full international safety approval and the CE mark, meets conducted noise EN55022 level A. The NFS40 series is designed for use in low power data networking, computer, telecom and industrial applications such as hubs, routers, POS terminals, cable modems, PABX's, industrial PC's and machine control.



Distributed By: **B.J. Wolfe Enterprises, Inc**
Tel: (800) 554-1224, (818) 889-8412
Email: info@bjwe.com

Rev.02.16.07
 NFS40 Series
 2 of 4

Specifications

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

OUTPUT SPECIFICATIONS		
Output voltage adjustability	+5 V output on triples Vout on singles	±5.0% ±5.0%
Line regulation LL to HL, FL	Main output Auxiliary outputs	±0.2% ±1.0%
Load regulation FL to NL	Main output Auxiliary outputs	±2.0% ±5.0%
Transient response	+5 V (1.5-3 A)	±120 mV max. dev. 500 µs recovery
Temperature coefficient	All outputs	±0.02%/°C
Overvoltage protection	+5 V output	125% ±15% Vout
Output power limit	Primary power limited	90 W input power limit
Short circuit protection	Single outputs Multiple outputs	Continuous Short term

INPUT SPECIFICATIONS		
Input voltage range	Universal input	85-264 Vac 120-370 Vdc
Input frequency range		47-440Hz
Max. input surge current	132 Vac, cold start 264 Vac, cold start	12 A max. 24 A max.
Safety ground leakage current	110 Vac, 60 Hz 230 Vac, 50 Hz	0.13 mA max. 0.32 mA max.

EMC CHARACTERISTICS		
Conducted emissions	EN55022, FCC part 15	Level A
Radiated emissions	EN55022	Level A
ESD air	EN61000-4-2, level 3	Perf. criteria 1
ESD contact	EN61000-4-2, level 4	Perf. criteria 1
Surge	EN61000-4-5, level 3	Perf. criteria 1
Fast transients	EN61000-4-4, level 3	Perf. criteria 1
Radiated immunity	EN61000-4-3, level 3	Perf. criteria 2
Conducted immunity	EN61000-4-6, level 3	Perf. criteria 2

GENERAL SPECIFICATIONS		
Hold-up time	110 Vac, 40 Watts 230 Vac, 40 Watts	14 ms 110 ms
Efficiency		70% typical
Isolation voltage	Input/output Input/chassis	3000 Vac 1500 Vac
Switching frequency		Variable
Approvals and standards (See Note 13)		VDE0805, EN60950 IEC950, IEC1010, UL1950 CSA C22.2 No. 950
Weight		280 g (9.88 oz)
MTBF (See Note 9)	MIL-HDBK-217E	170,000 hours

ENVIRONMENTAL SPECIFICATIONS		
Thermal performance (See Notes 8, 10)	Operating	0 °C to +70 °C
	Non-operating	-40 °C to +85 °C
	50 µC ambient temp., Convection cooled	40 W
	Forced air cooling	50 W @ 20 CFM
	50 µC to 70 µC ambient	Derate linearly to 50% load
	Peak (60 seconds)	60 W
Relative humidity	Non-condensing	5% to 80% RH
Altitude	Operating	10,000 feet max.
	Non-operating	40,000 feet max.
Vibration (See Note 11)	5 Hz to 500 Hz	2.4 G rms peak

Specifications Contd. Distributed By: B.J. Wolfe Enterprises, Inc, Tel: (800) 554-1224, (818) 889-8412, Email: info@bjwe.com


Rev.02.16.07
NFS40 Series
3 of 4

OUTPUT VOLTAGE	OUTPUT CURRENTS			RIPPLE ⁽⁴⁾	TOTAL REGULATION ⁽⁵⁾	MODEL NUMBER ^(14,15,D)
	MAX ⁽¹⁾	PEAK ⁽²⁾	FAN ⁽³⁾			
+5.1 V (A)	3 A	7 A	5 A	50 mV	±2.0%	NFS40-7608J ^(5,6)
+12.0 V (B)	2 A	3 A	2 A	120 mV	±5.0%	
-12.0 V (C)	0.35 A	1 A	0.5 A	120 mV	±5.0%	
+5.1 V (A)	4 A	7 A	5 A	50 mV	±2.0%	NFS40-7628J ⁽¹²⁾
+12.0 V (B)	0.35 A	1 A	0.5 A	120 mV	±5.0%	
-12.0 V (C)	0.35 A	1 A	0.5 A	120 mV	±5.0%	
+5.1 V (A)	3 A	7 A	5 A	50 mV	±2.0%	NFS40-7607J ^(5,6)
+12.0 V (B)	2 A	3 A	2 A	120 mV	±5.0%	
-5.0 V (C)	0.35 A	1 A	0.5 A	50 mV	±5.0%	
+5.1 V (A)	3 A	7 A	5 A	50 mV	±2.0%	NFS40-7610J ^(5,6)
+15.0 V (B)	2 A	2.5 A	2 A	150 mV	+10%/-3.0%	
-15.0 V (C)	0.35 A	1 A	0.5 A	150 mV	±5.0%	
+5.1 V	6 A	12 A	8 A	100 mV	±2.0%	NFS40-7605J
+12.0 V	3.3 A	5 A	4 A	120 mV	±2.0%	NFS40-7612J
+15.0 V	2.6 A	4 A	3.3 A	150 mV	±2.0%	NFS40-7615J
+24.0 V	1.6 A	2.5 A	2 A	240 mV	±2.0%	NFS40-7624J

Notes

- Natural convection cooled, 40 W maximum.
- Peak output current lasting less than 30 seconds with duty cycle less than 10%. During peak loading, outputs may go outside of total regulation limits. Peak total power must not exceed 60 W.
- Forced air, 20 CFM at 1 atmosphere, 50 W maximum.
- Figure is peak-to-peak. Output noise is measured across a 50 MHz bandwidth using a 12 inch twisted pair, terminated with a 47 µF capacitor.
- Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage within stated limits, load currents within stated limits, and output voltages adjusted to their factory settings. Also, $0.25 < I(A)/I(B) < 5.0$ to maintain stated regulation. This does not apply to the NFS40-7628 power supply as it has regulated auxiliary outputs.
- A minimum load of 0.5 A is required on the +5 V output to obtain full current from the negative output.
- The NFS40 offers the possibility of power sharing between outputs. Consult factory for details.
- Derating curve is application specific for ambient temperatures >50°C, for optimum reliability no part of the heatsink should exceed 110°C and no semiconductor case temperature should exceed 115°C.
- A 4 W minimum load is recommended to achieve the design MTBF.
- Caution: Allow a minimum of 1 second after disconnecting the power when making thermal measurements.
- Three orthogonal axes, sweep at 1 octave/minute, 5 minute dwell at four major resonances.
- The NFS40-7628 has separately linear regulated +12 V and -12 V outputs. The loading conditions in Notes 5 and 6 do not apply.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

PIN CONNECTIONS				
J1	-7608J, -7628J	-7607J	-7610J	SINGLES
Pin 1	AC Live	AC Live	AC Live	AC Line
Pin 2	AC Neutral	AC Neutral	AC Neutral	AC Neutral
J2				
Pin 1	+12 V	+12 V	+15 V	+Vout
Pin 2	+5.1 V	+5.1 V	+5.1 V	+Vout
Pin 3	+5.1 V	+5.1 V	+5.1 V	+Vout
Pin 4	Return	Return	Return	Return
Pin 5	Return	Return	Return	Return
Pin 6	-12 V	-5 V	-15 V	Return
P1(C)				
Pin 1	Safety Ground			

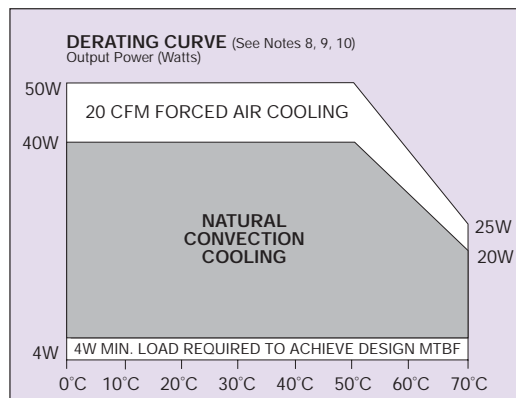


Distributed By: B.J. Wolfe Enterprises, Inc
Tel: (800) 554-1224, (818) 889-8412, Email: info@bjwe.com

Rev.02.16.07
 NFS40 Series
 4 of 4

Mechanical Notes

- A** In order to meet safety requirements, a non-metallic stand-off is mandatory for one hole as specified in the mechanical drawing above.
- B** The ground pad of the mounting hole near P1 allows system grounding through a metal stand-off.
- C** To improve conducted noise, the ground pad of the mounting hole near the output connector should be connected with the ground pad of the mounting hole near P1. Use metal stand-offs attached to a common metal chassis. This connection also significantly attenuates common mode noise.
- D** A standard L-bracket and cover is available for mounting which contains all screws, connectors and necessary mounting hardware. Order part number 'NFS40 COVER KIT'.

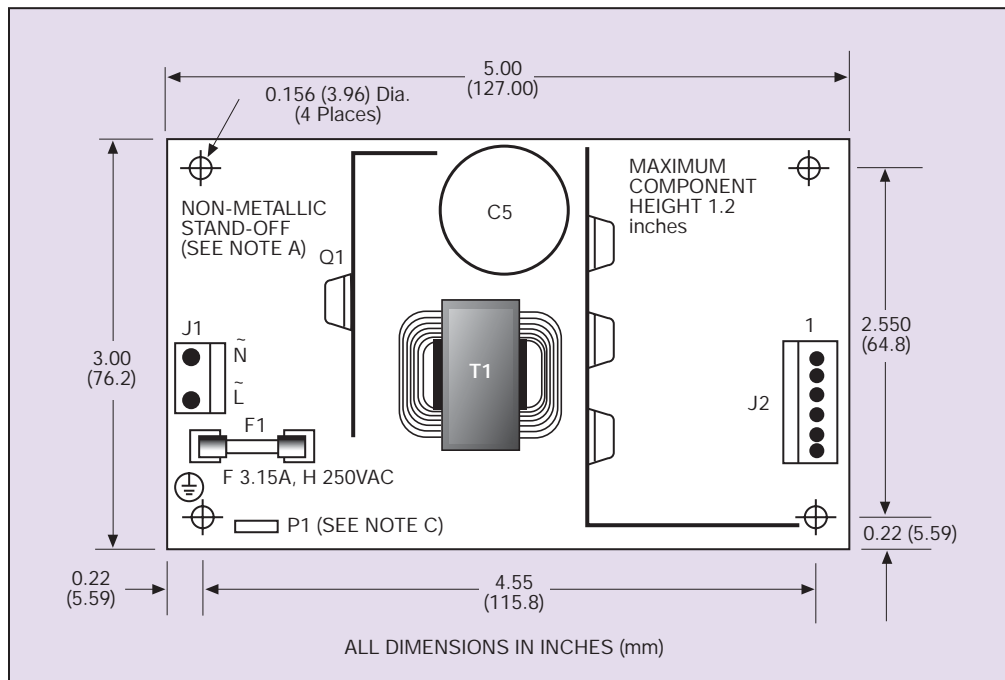

Americas

5810 Van Allen Way
 Carlsbad, CA 92008
 USA
 Telephone: +1 760 930 4600
 Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 Telephone: +44 (0) 1384 842 211
 Facsimile: +44 (0) 1384 843 355

Asia (HK)

16th - 17th Floors, Lu Plaza
 2 Wing Yip Street, Kwun Tong
 Kowloon, Hong Kong
 Telephone: +852 2176 3333
 Facsimile: +852 2176 3888

For global contact, visit:

www.powerconversion.com
technicalsupport@powerconversion.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- **Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2007 Emerson Electric Co.