


CONNECTORS FULL SIZE — 2-POLE STRIPANEL® WITH MOUNTING FRAME

CATALOG NUMBER 1033

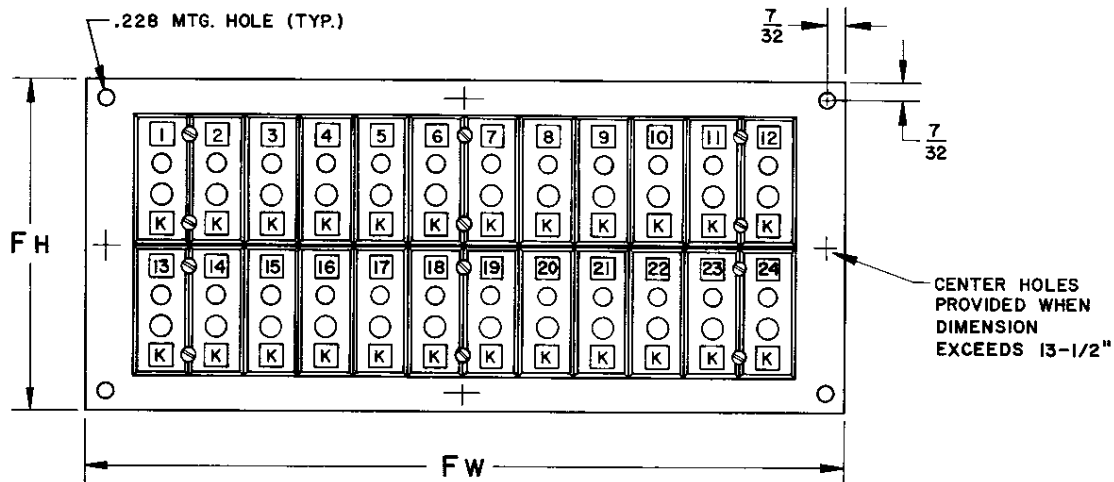

Dimension for Panel Assembly
C_H AND C_W ARE MOUNTING CUTOUT DIMENSIONS

NUMBER OF ROWS	CIRCUITS PER ROW	TOTAL CIRCUITS																								PRICE
		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		
1	F _H = 2 3/8" C _H = 1 1/2"	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	1033 Standard	
2	F _H = 4 3/8" C _H = 3 1/4"	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48		
3	F _H = 6 3/8" C _H = 5"	6	9	12	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72		
4	F _H = 7 7/8" C _H = 6 3/4"	8	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	84	88	92	96		
5	F _H = 9 5/8" C _H = 8 1/2"	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120		
6	F _H = 11 3/8" C _H = 10 1/4"	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138	144		
7	F _H = 13 1/8" C _H = 12"	14	21	28	35	42	49	56	63	70	77	84	91	98	105	112	119	126	133	140	147	154	161	168		
8	F _H = 14 7/8" C _H = 13 3/4"	16	24	32	40	48	56	64	72	80	88	96	104	112	120	128	136	144	152	160	168	176	184	192		
9	F _H = 16 5/8" C _H = 15 1/2"	18	27	36	45	54	63	72	81	90	99	108	117	126	135	144	153	162	171	180	189	198	207	216		
10	F _H = 18 3/8" C _H = 17 1/4"	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240		1133 Hi-Temp

- Strippanels with mounting frames can accommodate virtually any number of circuits.
- One-piece mounting frame is made of 3/32" thick rigid steel with flat black finish.
- For specifications see Strippanel 1032 section.
- For frame sizes other than those in table consult Factory.
- Horizontal rows are assumed unless specified vertical by the suffix "V" which are numbered from top to bottom: e.g. 1033 - 4 X 12 - 48 - K - V.
- Strippanels with mounting frames will withstand ambient temperatures of 400°F (205°C) continuous and 500°F (260°C) intermittent. Hi-Temp panels will withstand ambient temperatures to 800°F (425°C) continuous and 1000°F (540°C) intermittent.
- For corrosive applications, gold plated inserts are available. Caution — system errors can result from use of plated contacts if significant thermal gradients exist at connector.

TO ORDER:

1. Give Strippanel No. → 1033 - 4 X 12 - 48 - K
2. Specify No. of Horizontal Rows →
3. Specify No. of Circuits per Row →
4. Give Total Number of Circuits →
5. Specify Thermocouple Type Code →
6. For Vertical Rows Add Suffix "V"
e.g. 1033 - 4 x 12 - 48 - K - V
7. For Hi-Temp Strippanel In Frame:
e.g. 1133 - 4 x 12 - 48 - K
8. Availability: J,K,T,N,E,R,S,U, also "C" at extra cost.
9. Gold plated inserts are available at extra cost.
Use suffix "G" (i.e. 1033-4x12-48-K-G).