



Office: Corporate
 Phone: (800) 554-1224
 Fax: (818) 889-8417

B. J. Wolfe Enterprises, Inc.

C Single Chassis Mount AC/DC Series

Output Voltage	Output Current	Part Number Chassis Mount	Case	Output Voltage	Output Current	Part Number Chassis Mount	Case
Select Output 2-4	500mA	CM.5	CA	*Select Output 19-28	100mA	CM*.1	CB
	2000mA	CM*2	CB		200mA	CM*.2	CB
	3000mA	CM*3	CD		400mA	CM*.4	CC
	4000mA	CM*4	CE		600mA	CM*.6	CD
Select Output 5-9	200mA	CM.2	CA		800mA	CM*.8	CD
	300mA	CM*.3	CA		1000mA	CM*1	CE
	500mA	CM*.5	CA,B		1500mA	CM*1.5	CE
	800mA	CM*.8	CB	*Select Output 29-36	100mA	CM*.1	CB
	1000mA	CM*1	CB,C		200mA	CM*.2	CB
	1500mA	CM*1.5	CC		400mA	CM*.4	CC
	2000mA	CM*2	CC,D		600mA	CM*.6	CD
	2500mA	CM*2.5	CD		800mA	CM*.8	CD
	3000mA	CM*3	CE		1000mA	CM*1	CE
3500mA	CM*3.5	CE	*Select Output 37-43	100mA	CM*.1	CB	
4000mA	CM*4	CE		200mA	CM*.2	CB	
Select Output 10-18	100mA	CM.1		CA	400mA	CM*.4	CC
	300mA	CM*.3		CB	600mA	CM*.6	CD
	500mA	CM*.5		CB,C	800mA	CM*.8	CD
	800mA	CM*.8	CB,C	1000mA	CM*1	CE	
	1000mA	CM*1	CC,D	*Select Output 44-50	100mA	CM*.1	CB
	1500mA	CM*1.5	CD,E		200mA	CM*.2	CB
	2000mA	CM*2	CE		400mA	CM*.4	CC
2500mA	CM*2.5	CE	600mA		CM*.6	CD	
				800mA	CM*.8	CD	

Specifications


Parameter	Limit
VAC In	120 ±15VAC @ 47-420Hz
Line Regulation	0.05%
Load Regulation	0.03% (38-48 Vout), 0.05% (<37 Vout)
Ripple/Noise	0.5mVrms (>24 Vout), 1.0mVrms (<24 Vout)
Vout Accuracy	1% Fixed
Isolation Input	500 Meg OHMS
Isolation Vin/Vout	500VDC
Temperature Coefficient	0.015%/C
Operating Temperature	-25°C to +71°C
Storage Temperature	-55°C to +85°C
Short Circuit Protection	Auto-Recovery
Subject To Change Without Notice	



Office: Corporate
Phone: (800) 554-1224
Fax: (818) 889-8417

B. J. Wolfe Enterprises, Inc.

C Case

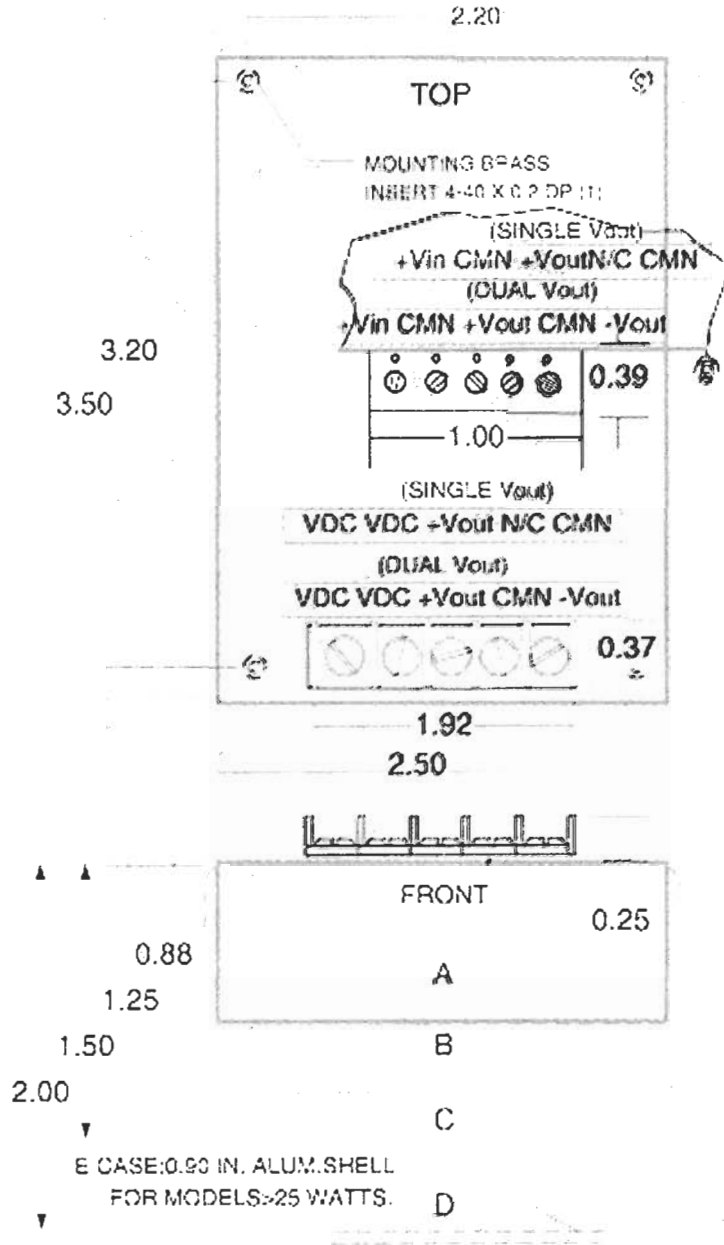

CASE C