

**Distributed By:**  
**B.J. Wolfe Enterprises, Inc**  
**T:(818) 889-8412, F:(818) 889-8417**  
**E:info@bjwe.com**

# FDC05-SERIES



- 5 WATTS OUTPUT POWER
- 2:1 AND 4:1 WIDE INPUT VOLTAGE RANGE
- INTERNATIONAL SAFETY STANDARD APPROVAL
- SIX-SIDED CONTINUOUS SHIELD
- HIGH EFFICIENCY UP TO 83%
- STANDARD 2" X 1" X 0.4" PACKAGE
- FIXED SWITCHING FREQUENCY

The FDC05 and FDC05-W series offer 5 watts of output power from a 2 x 1 x 0.4 inch package with derating to 71°C ambient temperature. FDC05 series have 2:1 wide input voltage of 9-18, 18-36 and 36-75VDC. FDC05-W series have 4:1 ultra wide input voltage of 9-36 and 18-75V DC. The FDC05 and FDC05-W features 1600V DC of isolation, short-circuit protection, as well as six-sided shielding. The safety approved with EN60950 and UL1950. All models are particularly suitable for telecom batteries, industrial mobile telecom and test equipment applications. According the extended operating temperature range, there are "M1" and "M2" version for special application.

UL E193009  
 TUV R3-50007936  
 CB JPTUV-003641  
 CE MARK

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power		5 Watts max	
Voltage accuracy	Full load and nominal V <sub>in</sub>	±2%	
Minimum load (Note 1)		10% of FL	
Line regulation	LL to HL at Full Load	±0.2%	
Load regulation	10% to 100% FL Single Dial	±0.2% ±1%	
Cross regulation (Data)	Asymmetrical load 25% / 100% FL	±5%	
Ripple and noise	20MHz bandwidth	50mVp-p	
Temperature coefficient		±0.02% / °C, max	
Transient response recovery time	25% load step change FL to 1/2 FL ±1% error band	Single 200µs Dial 200µs	
Over load protection	% of FL at nominal input	170% typ	
Short-circuit protection		Continuous, automatic recovery	
INPUT SPECIFICATIONS			
Input voltage range	FDC05 12V nominal input	9 - 18VDC	
	24V nominal input	18 - 36VDC	
	48V nominal input	36 - 75VDC	
	FDC05-W 24V nominal input	9 - 36VDC	
	48V nominal input	18 - 75VDC	
Input filter		PI type	
Input surge voltage 100ms max	12V input	36VDC	
	24V input	50VDC	
	48V input	100VDC	
Input reflected ripple (Note 2)	Nominal V <sub>in</sub> and full load	20mVp-p	
Startup time	Nominal V <sub>in</sub> and constant resistor load	600ms typ	
Remote ON/OFF (Note 3) (Positive logic)	DC-DC ON	Open or 3.5V < V <sub>r</sub> < 12V	
	DC-DC OFF	Short or 0V < V <sub>r</sub> < 12V	
	(Negative logic)	DC-DC ON	Short or 0V < V <sub>r</sub> < 12V
		DC-DC OFF	Open or 3.5V < V <sub>r</sub> < 12V
Remote off input current	Nominal V <sub>in</sub>	2.5mA	

GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation Voltage	Input to Output to Case	1600VDC, min
Isolation resistance		10 <sup>9</sup> ohms, min
Isolation capacitance		300pF, max
Switching frequency	Standard	300kHz, typ
	"W" series	200kHz, typ
Approvals and standard		IEC60950, UL1950, EN60950
Case material		Nickel plated copper
Base material		Non-conductive black plastic
Potting material		Epoxy (UL94-V0)
Dimensions		2.00 X 1.00 X 0.40 inch (50.8 X 25.4 X 10.2 mm)
Weight		27g (0.95oz)
MTBF (Note 4)		3.145 x 10 <sup>6</sup> hrs
ENVIRONMENTAL SPECIFICATIONS		
Operating temperature range (Reference derating curve)	Standard	-25°C ~ +85°C (with derating)
	M1 (Note 5)	-40°C ~ +85°C (non-derating)
	M2 (W series)	-40°C ~ +85°C (with derating)
Maximum case temperature		+100°C
Storage temperature range		-65°C ~ +105°C
Thermal impedance (Note 6)	Nature connection	12°C/Watt
	Nature connection with heatsink	10°C/Watt
Thermal shock		MIL-STD-883C
Vibration		10-55Hz, 2G, 30min tests along X, Y and Z
Relative humidity		5% to 95% RH
EMC CHARACTERISTICS		
Conducted emissions	EN55022	Level IA
Radiated emissions	EN55022	Level IA
ESD	EN61000-4-2	Perf. Criteria2
Radiated immunity	EN61000-4-3	Perf. Criteria2
Fast transient	EN61000-4-4	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Conducted immunity	EN61000-4-6	Perf. Criteria2

**Distributed By:**  
**B.J. Wolfe Enterprises, Inc**  
**T:(818) 889-8412, F:(818) 889-8417**  
**E:info@bjwe.com**






## 5 WATTS DC-DC CONVERTER

Model Number	Input Range	Output Voltage	Output Current	Input Current <sup>(7)</sup>	Eff <sup>(8)</sup> (%)	Capacitor Load max <sup>(9)</sup>
FDC05-12S33	9 - 18 VDC	3.3 VDC	1000mA	387mA	75	3700µF
FDC05-12S05	9 - 18 VDC	5 VDC	1000mA	556mA	79	1700µF
FDC05-12S12	9 - 18 VDC	12 VDC	470mA	610mA	81	290µF
FDC05-12S15	9 - 18 VDC	15 VDC	400mA	658mA	80	188µF
FDC05-12D05	9 - 18 VDC	±5 VDC	±500mA	595mA	74	±850µF
FDC05-12D12	9 - 18 VDC	±12 VDC	±230mA	597mA	81	±140µF
FDC05-12D15	9 - 18 VDC	±15 VDC	±190mA	609mA	82	±171µF
FDC05-24S33 (M)	18 - 36 (9 - 36) VDC	3.3 VDC	1000mA	199 (196mA)	73 (74)	3700µF
FDC05-24S05 (M)	18 - 36 (9 - 36) VDC	5 VDC	1000mA	282 (274mA)	78 (80)	1700µF
FDC05-24S12 (M)	18 - 36 (9 - 36) VDC	12 VDC	470mA	305 (301mA)	81 (82)	290µF
FDC05-24S15 (M)	18 - 36 (9 - 36) VDC	15 VDC	400mA	325 (325mA)	81 (81)	188µF
FDC05-24D05 (M)	18 - 36 (9 - 36) VDC	±5 VDC	±500mA	289 (289mA)	76 (76)	±850µF
FDC05-24D12 (M)	18 - 36 (9 - 36) VDC	±12 VDC	±230mA	295 (295mA)	82 (82)	±140µF
FDC05-24D15 (M)	18 - 36 (9 - 36) VDC	±15 VDC	±190mA	308 (301mA)	81 (83)	±171µF
FDC05-48S33 (M)	36 - 75 (18 - 75) VDC	3.3 VDC	1000mA	100 (100mA)	73 (73)	3700µF
FDC05-48S05 (M)	36 - 75 (18 - 75) VDC	5 VDC	1000mA	145 (149mA)	76 (74)	1700µF
FDC05-48S12 (M)	36 - 75 (18 - 75) VDC	12 VDC	470mA	151 (151mA)	82 (82)	290µF
FDC05-48S15 (M)	36 - 75 (18 - 75) VDC	15 VDC	400mA	160 (163mA)	82 (81)	188µF
FDC05-48D05 (M)	36 - 75 (18 - 75) VDC	±5 VDC	±500mA	149 (149mA)	74 (74)	±850µF
FDC05-48D12 (M)	36 - 75 (18 - 75) VDC	±12 VDC	±230mA	149 (149mA)	81 (81)	±140µF
FDC05-48D15 (M)	36 - 75 (18 - 75) VDC	±15 VDC	±190mA	154 (154mA)	81 (81)	±171µF

**Note**

- The FDC05 (M) series require a minimum 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specifications.
- Simulated source impedance of 12mH. 12mH inductor or series with +Vin.
- The ON/OFF control is optional function. There are positive logic and negative logic. The pin voltage is referenced to negative input.  
To order positive logic ON-OFF control add the suffix-P (Ex: FDC05-24S05-P)  
To order negative logic ON-OFF control add the suffix-N (Ex: FDC05-24S05-N)
- BELLCORE TR-NWT-000332, Case 1: 50% Stress, Temperature at 40°C.  
Ground fixed and controlled environment.
- M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than standard and M2 version.
- Heat sink is optional and P/N: TG-0020A.
- Maximum value at nominal input voltage and full load of standard type.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistor load.

PIN	SINGLE	DUAL OUTPUT
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	+O OUTPUT	+O OUTPUT
4	NO PIN	COMMON
5	-OUTPUT	-OUTPUT
6	CTRL (Option)	CTRL (Option)

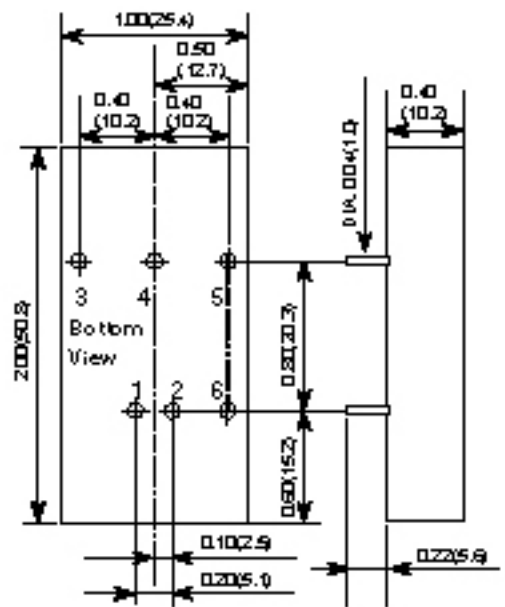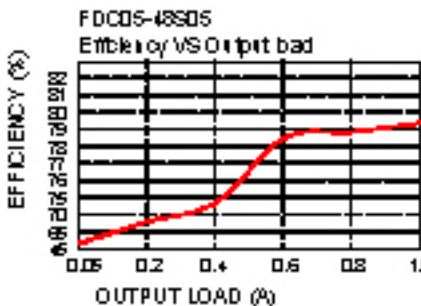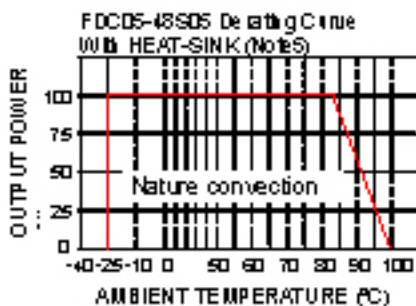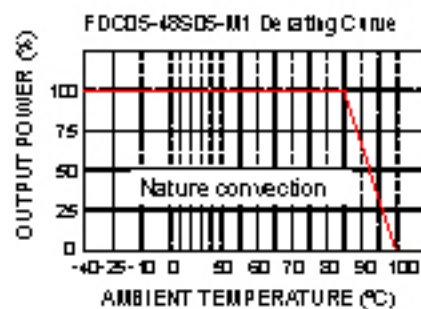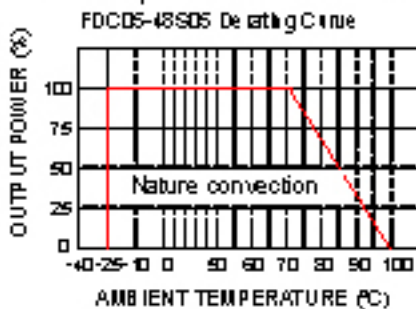

- All dimensions in inches (mm)
- Pin Pitch tolerance ±0.014 (0.35)