


CONNECTORS FULL SIZE — 2-POLE — 19" RACK — MOUNTED STRIPANEL®

CATALOG NUMBER 1041

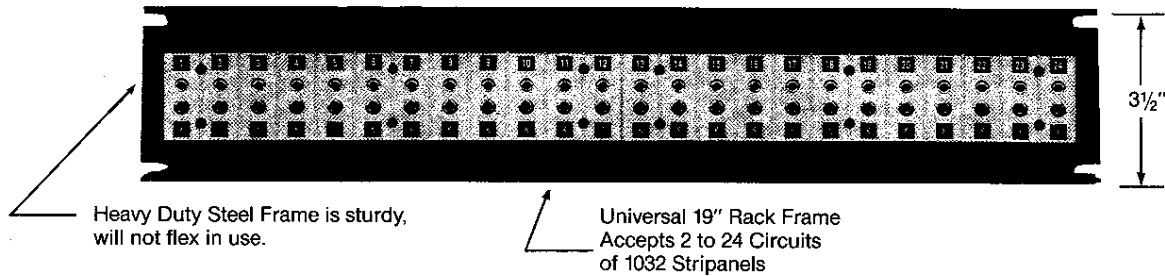

Heavy Duty Steel Frame is sturdy, will not flex in use.

Universal 19" Rack Frame Accepts 2 to 24 Circuits of 1032 Stripanels

- Universal 19" Rack accepts 2 to 24 circuits of 1032 Stripanels, less than 24 circuits are supplied with filler sections.
- Circuits can be added in the field without changing frame.
- 19" Rack Frame is made of sturdy 10 ga. steel that will not flex in use. Standard frame is flat black. High-Temp frame is bright silver finish.
- Thermocouple type and circuit numbers are marked on face of Stripanel with corresponding circuit numbers and polarity identification on the back. Stripanels are numbered starting from "1" unless specified otherwise.
- Stripanels are molded of glass-filled thermoset compounds (will not melt) for high strength and dependability. The color coded panels will withstand ambient temperatures to 400°F (205°C) continuous and 500°F (260°C) intermittent. High-Temperature panels (All Hi-Temp panels are color coded red) will withstand ambient temperatures to 800°F (425°C) continuous and 1000°F (540°C) intermittent.
- Inserts are spring loaded collet type to assure positive full contact with the negative insert larger making it virtually impossible to mismatch.
- For corrosive application, gold plated contacts are available. Caution — system errors can result from use of plated contacts if significant thermal gradients exist at connection.

TO ORDER:

1. Give Code No. _____ ↓
2. Specify number of circuits _____ ↑
3. Designate Thermocouple Type by Code _____ ↑
4. For Hi-Temp Stripanel: 1141 - 24 - K

TYPE CODE	INSERT MAT'L ALLOY		COLOR CODE
	POSITIVE	NEGATIVE	
J	IRON	CONSTANTAN	BLACK
T	COPPER	CONSTANTAN	BLUE
K	CHROMEL™	ALUMEL™	YELLOW
N	NICROSIL	NISIL	ORANGE
R	COPPER	#11 ALLOY	GREEN
S	COPPER	#11 ALLOY	GREEN
E	CHROMEL™	CONSTANTAN	VIOLET
U	COPPER	COPPER	WHITE
C	#405 ALLOY	#426 ALLOY	BROWN
(ALL HI-TEMP STRIPANELS)			RED

*For type "C" at extra cost.

Gold plated contacts available at extra cost. Use suffix "G" (i.e. 1041-24-K-G).

Distributed by: B. J. Wolfe Enterprises, Inc. • (<http://www.bjwe.com>)
5321 Derry Avenue, Unit E • Agoura Hills, CA 91301
(800) 554-1224 • +001 818 889-8412 • Fax (818) 889-8417